

LLKSC...H110 Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

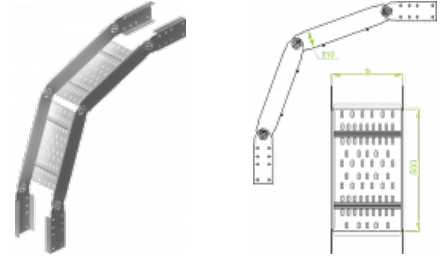

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLKSC200H110	200	231622	10	9,25
LLKSC300H110	300	231632	4	9,74
LLKSC400H110	400	231642	4	10,21
LLKSC500H110	500	231652	4	10,69
LLKSC600H110	600	231662	4	11,16