

KKST...H120 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

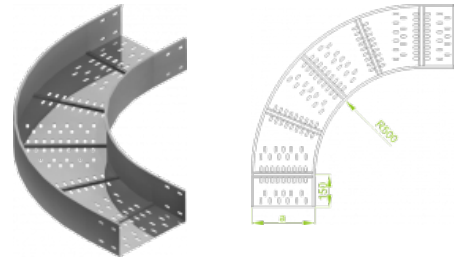

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKST200H120	200	240723	2	13,32
KKST300H120	300	240733	2	15,36
KKST400H120	400	240743	2	18,23
KKST500H120	500	240753	2	21,11
KKST600H120	600	240763	2	24,05