

## LWKSC...H120 90° Vertical Bend - Internal

### Overview:

**Application**

Diversion in cable routing

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

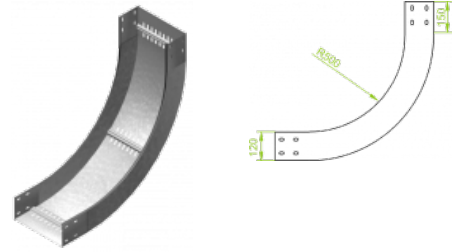

**For joining fittings to cable tray use Straight Connectors for Fittings**

**LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.**

**FEATURES & BENEFITS:**

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LWKSC200H120	200	241122	2	8,18
LWKSC300H120	300	241132	2	9,41
LWKSC400H120	400	241142	2	10,40
LWKSC500H120	500	241152	2	11,93
LWKSC600H120	600	241162	2	13,32