

## KKST...H150 90° Horizontal Bend

### Overview:

**Application**

Diversion in cable routing

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

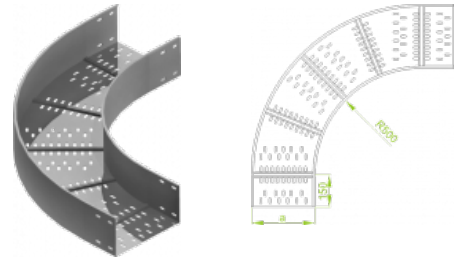

### Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKST200H150	200	270723	2	14,58
KKST300H150	300	270733	2	17,34
KKST400H150	400	270743	2	20,22
KKST500H150	500	270753	2	23,22
KKST600H150	600	270763	2	26,16