

KKSMC...H150 45° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

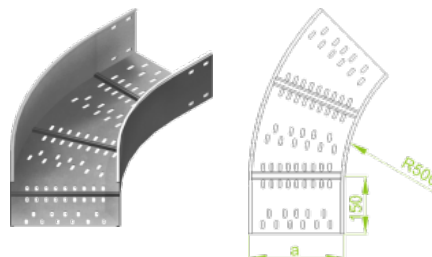

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKSMC200H150	200	270822	2	7,17
KKSMC300H150	300	270832	2	8,54
KKSMC400H150	400	270842	2	10,02
KKSMC500H150	500	270852	2	11,50
KKSMC600H150	600	270862	2	13,20