

KKSMT...H150 45° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

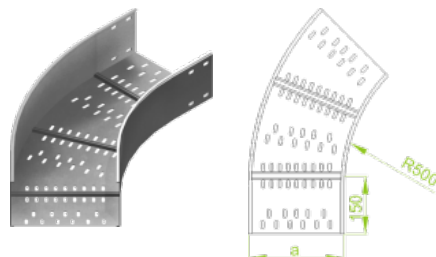

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKSMT200H150	200	270823	2	9,16
KKSMT300H150	300	270833	2	10,85
KKSMT400H150	400	270843	2	12,67
KKSMT500H150	500	270853	2	14,54
KKSMT600H150	600	270863	2	16,37