

LLKST...H150 Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

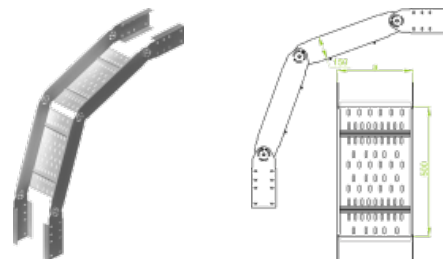

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLKST200H150	200	271623	10	20,52
LLKST300H150	300	271633	4	21,17
LLKST400H150	400	271643	4	21,72
LLKST500H150	500	271653	4	22,37
LLKST600H150	600	271663	4	22,92