

LZKSC...H200 90° Vertical Bend - External

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)


L- powder coating in a full range of colours (PC)

For joining fittings to cable tray use Straight Connectors for Fittings

LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.

FEATURES & BENEFITS:

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

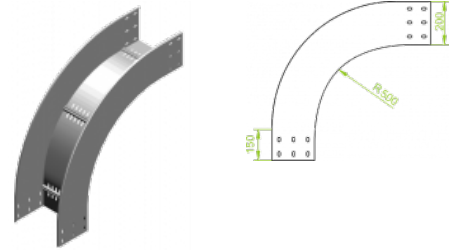

Versions:

Sheet thickness: **2,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|--------------|--------------|------------------|-----------------|--------------|
| LZKSC200H200 | 200 | 291222 | 2 | 12,02 |
| LZKSC300H200 | 300 | 291232 | 2 | 13,33 |
| LZKSC400H200 | 400 | 291242 | 2 | 14,28 |
| LZKSC500H200 | 500 | 291252 | 2 | 15,81 |
| LZKSC600H200 | 600 | 291262 | 2 | 17,02 |