

LLKST...H200 Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

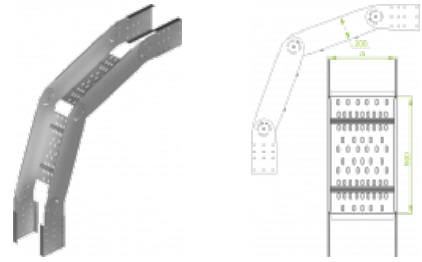

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLKST200H200	200	281623	10	25,50
LLKST300H200	300	281633	4	26,15
LLKST400H200	400	281643	4	26,70
LLKST500H200	500	281653	4	27,35
LLKST600H200	600	281663	4	27,90