

OPZLC...H100 Horizontal Bypass - Left

Overview:

APPLICATION

Bypassing obstacles in the vertical plane.

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For joining fittings to cable tray lengths use Straight Connectors LZC...

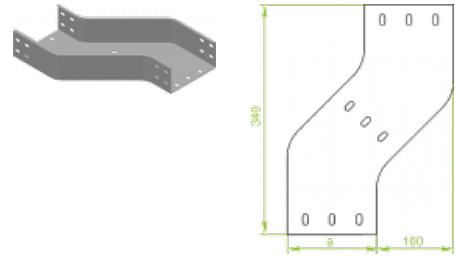

Versions:

Sheet thickness: **2,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|--------------|--------------|------------------|-----------------|--------------|
| OPZLC100H100 | 100 | 314810 | 10 | 1,79 |
| OPZLC200H100 | 200 | 314820 | 10 | 2,33 |
| OPZLC300H100 | 300 | 314830 | 4 | 2,85 |
| OPZLC400H100 | 400 | 314840 | 4 | 3,38 |
| OPZLC500H100 | 500 | 314850 | 4 | 3,90 |
| OPZLC600H100 | 600 | 314860 | 4 | 4,43 |