

## POPNZP...H50 Cover For Vertical Bypass H50

### Overview:

**APPLICATION**

Protecting cables against damage. Tight cover protection against accumulation of dirt and dust.

**Material**

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)


**Available to order:**

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**Note:**

**In every cover are pre-punched holes, necessary for dipping-in melted zinc (ref. hot-dip galvanizing process)**

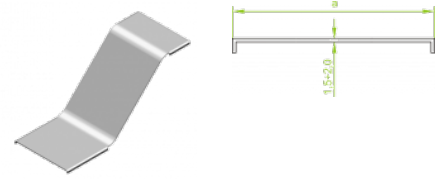

### Versions:

Sheet thickness: 1,5 mm

| Symbol       | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|--------------|--------------|------------------|-----------------|--------------|
| POPNZP50H50  | 50           | 335905           | 20              | 0,23         |
| POPNZP100H50 | 100          | 335910           | 20              | 0,49         |
| POPNZP200H50 | 200          | 335920           | 10              | 0,96         |
| POPNZP300H50 | 300          | 335930           | 10              | 1,43         |
| POPNZP400H50 | 400          | 335940           | 4               | 1,90         |
| POPNZP500H50 | 500          | 335950           | 4               | 2,37         |
| POPNZP600H50 | 600          | 335960           | 4               | 2,84         |