

## LDST...H100 90° Horizontal Bend

### Overview:

**Application**

Diversion in cable routing

**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

**Fittings of any internal radius available upon request.  
For joining fittings to cable ladder lengths use Straight Connector LSSU...  
and sets of Screw SGK8×16**

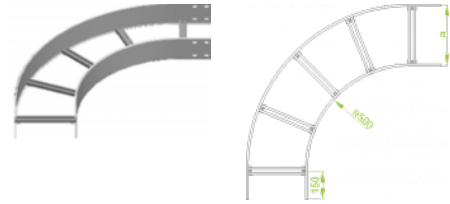

### Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDST200H100	200	410923	2	8,27
LDST300H100	300	410933	2	9,14
LDST400H100	400	410943	1	10,42
LDST500H100	500	410953	1	11,22
LDST600H100	600	410963	1	13,05