

LLDST...H100 Ajustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

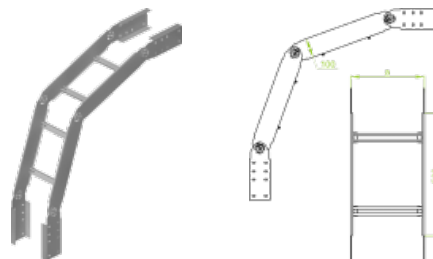

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLDST200H100	200	413423	1	12,27
LLDST300H100	300	413433	1	12,50
LLDST400H100	400	413443	1	13,54
LLDST500H100	500	413453	1	14,02
LLDST600H100	600	413463	1	14,59