

TDSC...H110 Horizontal Tee

Overview:

Application

Branching out cable runs

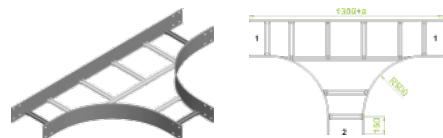
Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

Fittings of any internal radius available upon request.
For joining fittings to cable ladder lengths use Straight
Connector LSSU...
and sets of Screw SGKM8×16
In case of special orders please specify dimensions a and b.


Versions:

 Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
TDSC200H110	200	412622	1	9,51
TDSC300H110	300	412632	1	10,64
TDSC400H110	400	412642	1	11,61
TDSC500H110	500	412652	1	12,97
TDSC600H110	600	412662	1	14,04