

TDST...H110 Horizontal Tee


Overview:

Application
Branching out cable runs

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

Fittings of any internal radius available upon request.
For joining fittings to cable ladder lengths use Straight Connector LSSU... and sets of Screw SGKM8×16
In case of special orders please specify dimensions a and b.

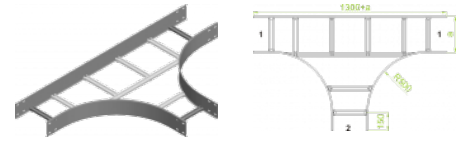

Versions:

Sheet thickness: **3,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------|--------------|------------------|-----------------|--------------|
| TDST200H110 | 200 | 412623 | 1 | 12,89 |
| TDST300H110 | 300 | 412633 | 1 | 14,16 |
| TDST400H110 | 400 | 412643 | 1 | 15,19 |
| TDST500H110 | 500 | 412653 | 1 | 16,79 |
| TDST600H110 | 600 | 412663 | 1 | 17,96 |