

LWDSC...H110 90° Vertical Bend - Internal

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For joining fittings to cable tray use Straight Connectors for Fittings
LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.
FEATURES & BENEFITS:

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

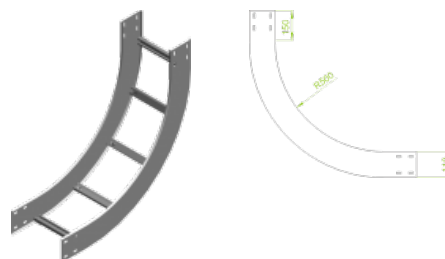

Versions:

 Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LWDSC200H110	200	412822	1	5,95
LWDSC300H110	300	412832	1	6,36
LWDSC400H110	400	412842	1	6,78
LWDSC500H110	500	412852	1	7,20
LWDSC600H110	600	412862	1	7,61