

## LLDSC...H110 Adjustable Vertical Bend

### Overview:

**Application**

Diversion in cable routing. Full-range angle adjustment with a lock

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

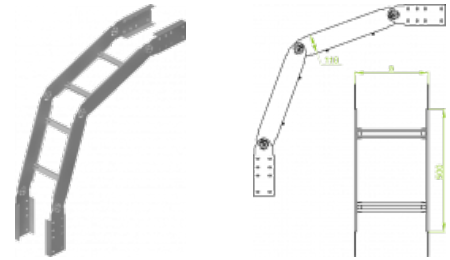

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
<b>LLDSC200H110</b>	<b>200</b>	<b>413722</b>	<b>10</b>	<b>9,15</b>
<b>LLDSC300H110</b>	<b>300</b>	<b>413732</b>	<b>4</b>	<b>9,56</b>
<b>LLDSC400H110</b>	<b>400</b>	<b>413742</b>	<b>4</b>	<b>10,01</b>
<b>LLDSC500H110</b>	<b>500</b>	<b>413752</b>	<b>4</b>	<b>10,45</b>
<b>LLDSC600H110</b>	<b>600</b>	<b>413762</b>	<b>4</b>	<b>10,86</b>