

LLDST...H110 Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

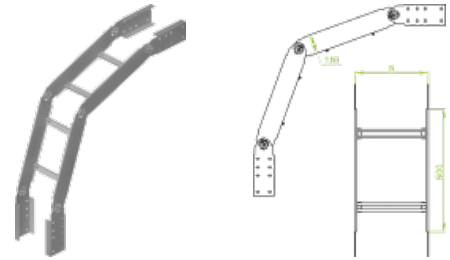

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLDST200H110	200	413723	10	13,35
LLDST300H110	300	413733	4	13,78
LLDST400H110	400	413743	4	14,25
LLDST500H110	500	413753	4	14,73
LLDST600H110	600	413763	4	15,14