

## ELDSC...H110 Adjustable Vertical Bend Element

### Overview:

#### Application

Diversion in cable routing. Full-range angle adjustment with a lock

#### Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

#### Available to order:

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E**- stainless steel (SS)

**L**- powder coating in a full range of colours (PC)

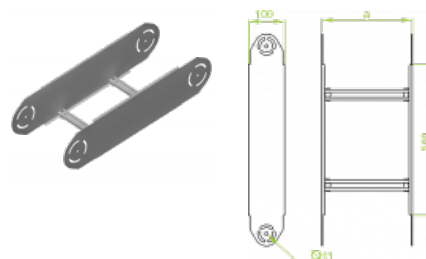

**Capability of creating vertical bends of any internal radius through joining articulated connectors. For the installation of segments of adjustable vertical bend element use Screw Sets M10x20**

### Versions:

Sheet thickness: **2,0 mm**

| Symbol       | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|--------------|--------------|------------------|-----------------|--------------|
| ELDSC200H110 | 200          | 413822           | 10              | 3,10         |
| ELDSC300H110 | 300          | 413832           | 4               | 3,31         |
| ELDSC400H110 | 400          | 413842           | 4               | 3,54         |
| ELDSC500H110 | 500          | 413852           | 4               | 3,77         |
| ELDSC600H110 | 600          | 413862           | 4               | 3,99         |