

LLDSC...H120 Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

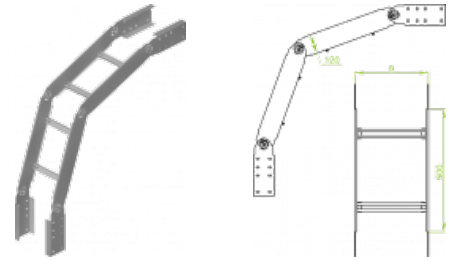

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLDSC200H120	200	435022	10	10,43
LLDSC300H120	300	435032	4	10,91
LLDSC400H120	400	435042	4	11,38
LLDSC500H120	500	435052	4	11,87
LLDSC600H120	600	435062	4	12,34