

LLDSC...H150 Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

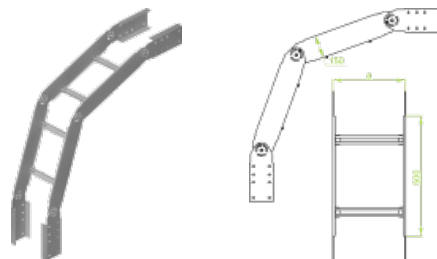

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLDSC200H150	200	435322	10	13,75
LLDSC300H150	300	435332	4	14,23
LLDSC400H150	400	435342	4	14,70
LLDSC500H150	500	435352	4	15,18
LLDSC600H150	600	435362	4	15,66