

LLDST...H150 Ajustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

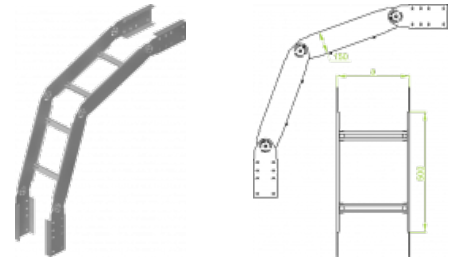

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLDST200H150	200	435323	10	20,25
LLDST300H150	300	435333	4	20,77
LLDST400H150	400	435343	4	21,30
LLDST500H150	500	435353	4	21,82
LLDST600H150	600	435363	4	22,34