

ELDSC...H150 Adjustable Vertical Bend Element

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

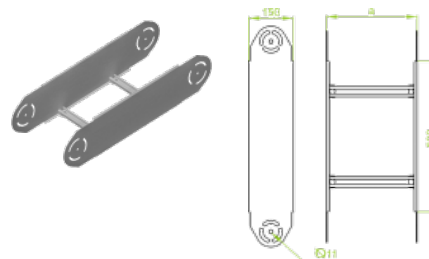

Capability of creating vertical bends of any internal radius through joining articulated connectors. For the installation of segments of adjustable vertical bend element use Screw Sets M10x20

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELDSC200H150	200	435422	10	4,75
ELDSC300H150	300	435432	4	4,99
ELDSC400H150	400	435442	4	5,23
ELDSC500H150	500	435452	4	5,47
ELDSC600H150	600	435462	4	5,71