

## ELDST...H150 Adjustable Vertical Bend Element

### Overview:

**Application**

Diversion in cable routing. Full-range angle adjustment with a lock

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

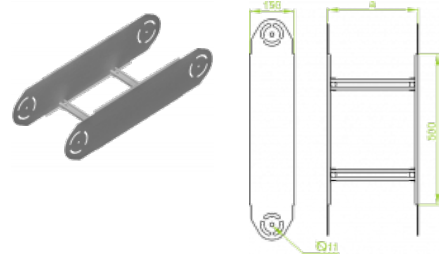

**Capability of creating vertical bends of any internal radius through joining articulated connectors. For the installation of segments of adjustable vertical bend element use Screw Sets M10x20**

### Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELDST200H150	200	435423	10	6,95
ELDST300H150	300	435433	4	7,21
ELDST400H150	400	435443	4	7,47
ELDST500H150	500	435453	4	7,73
ELDST600H150	600	435463	4	7,99