

LDST...H200 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**Fittings of any internal radius available upon request.
For joining fittings to cable ladder lengths use Straight Connector LSSU...
and sets of Screw SGK8×16**

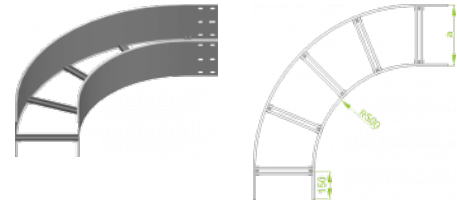

Versions:

Sheet thickness: **3,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------|--------------|------------------|-----------------|--------------|
| LDST200H200 | 200 | 434123 | 1 | 14,21 |
| LDST300H200 | 300 | 434133 | 1 | 15,50 |
| LDST400H200 | 400 | 434143 | 1 | 17,14 |
| LDST500H200 | 500 | 434153 | 1 | 18,24 |
| LDST600H200 | 600 | 434163 | 1 | 20,55 |