

## LDSMT...H200 45° Horizontal Bend

### Overview:

**Application**

Diversion in cable routing

**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


**Available to order:**

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**Fittings of any internal radius available upon request.  
For joining fittings to cable ladder lengths use Straight  
Connector LSSU...  
and sets of Screw SGK8×16**

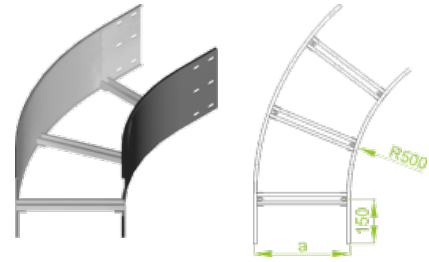

### Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
<b>LDSMT200H200</b>	<b>200</b>	<b>435523</b>	<b>2</b>	<b>9,39</b>
<b>LDSMT300H200</b>	<b>300</b>	<b>435533</b>	<b>2</b>	<b>10,25</b>
<b>LDSMT400H200</b>	<b>400</b>	<b>435543</b>	<b>2</b>	<b>11,33</b>
<b>LDSMT500H200</b>	<b>500</b>	<b>435553</b>	<b>2</b>	<b>12,06</b>
<b>LDSMT600H200</b>	<b>600</b>	<b>435563</b>	<b>2</b>	<b>13,06</b>