

WMCT... Bracket

Overview:

APPLICATION

Supporting cable trays and ladders, pipes, and other systems' components under very heavy load


Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

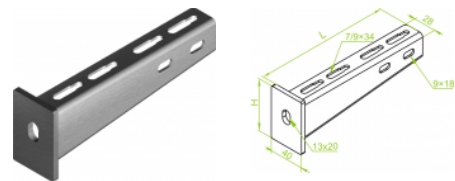

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WMCT100	115	711911	10	60	0,49	3,30
WMCT200	215	711921	10	70	0,49	3,30
WMCT300	315	711931	8	80	0,70	3,30
WMCT400	415	711941	6	100	1,11	3,10
WMCT500	515	711951	1	110	1,51	3,00
WMCT600	615	711961	1	130	1,94	2,70
WMCT700	715	711971	1	140	2,40	2,40
WMCT800	815	711981	1	150	2,80	2,20
WMCT900	915	711991	1	160	3,20	2,00
WMCT1000	1015	711901	1	170	3,67	2,00