

## WPCD...N Ceiling Bracket


### Overview:

**Application**  
Suspending cable routes.

**Material**  
Steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**Available to order:**  
**E-** stainless steel (SS)  
**L-** powder coating in a full range of colours (PC)

Note: A new way of joining channels by of special rivets

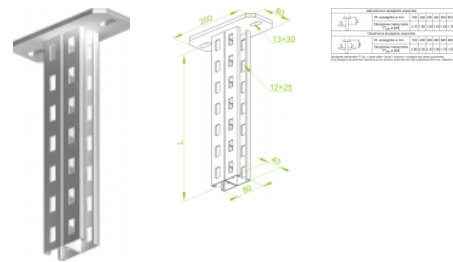

### Versions:

| Symbol    | Length L [m] | Catalogue number | Quantity in box | Weight 1 pc. |
|-----------|--------------|------------------|-----------------|--------------|
| WPCD200N  | 200          | 730820           | 10              | 1,48         |
| WPCD300N  | 300          | 730830           | 10              | 1,68         |
| WPCD400N  | 400          | 730840           | 4               | 2,26         |
| WPCD500N  | 500          | 730850           | 4               | 2,65         |
| WPCD600N  | 600          | 730860           | 4               | 3,04         |
| WPCD700N  | 700          | 730870           | 2               | 3,50         |
| WPCD800N  | 800          | 730880           | 2               | 3,82         |
| WPCD900N  | 900          | 730890           | 2               | 4,21         |
| WPCD1000N | 1000         | 750811           | 2               | 4,60         |
| WPCD2000N | 2000         | 750812           | 2               | 8,50         |
| WPCD3000N | 3000         | 750813           | 2               | 12,40        |