


## UC... Beam Clamp

### Overview:

**Application**  
Suspending cable routes

**Material**  
Steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**Available to order:**  
E- stainless steel (SS)  
L- powder coating in a full range of colours (PC)

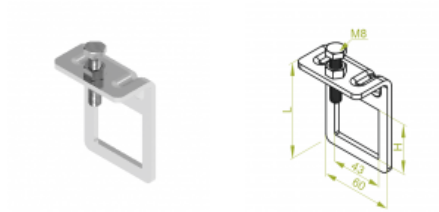

### Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
UC22	62	752401	100	23	0,15	2,00
UC40	80	752402	50	41	0,16	2,00
UC60	100	752403	50	61	0,17	2,00