

OPNP...H50 Vertical Bypass

Overview:

Application

Bypassing mechanical obstacles in cable routing

Material



Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)




For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
OPNP50H50	50	154605	10	0,80
OPNP100H50	100	154610	10	1,22
OPNP150H50	150	154615	10	1,60
OPNP200H50	200	154620	10	1,98
OPNP300H50	300	154630	4	2,92
OPNP400H50	400	154640	4	3,56
OPNP500H50	500	154650	4	4,68
OPNP600H50	600	154660	4	5,24

Connected products:

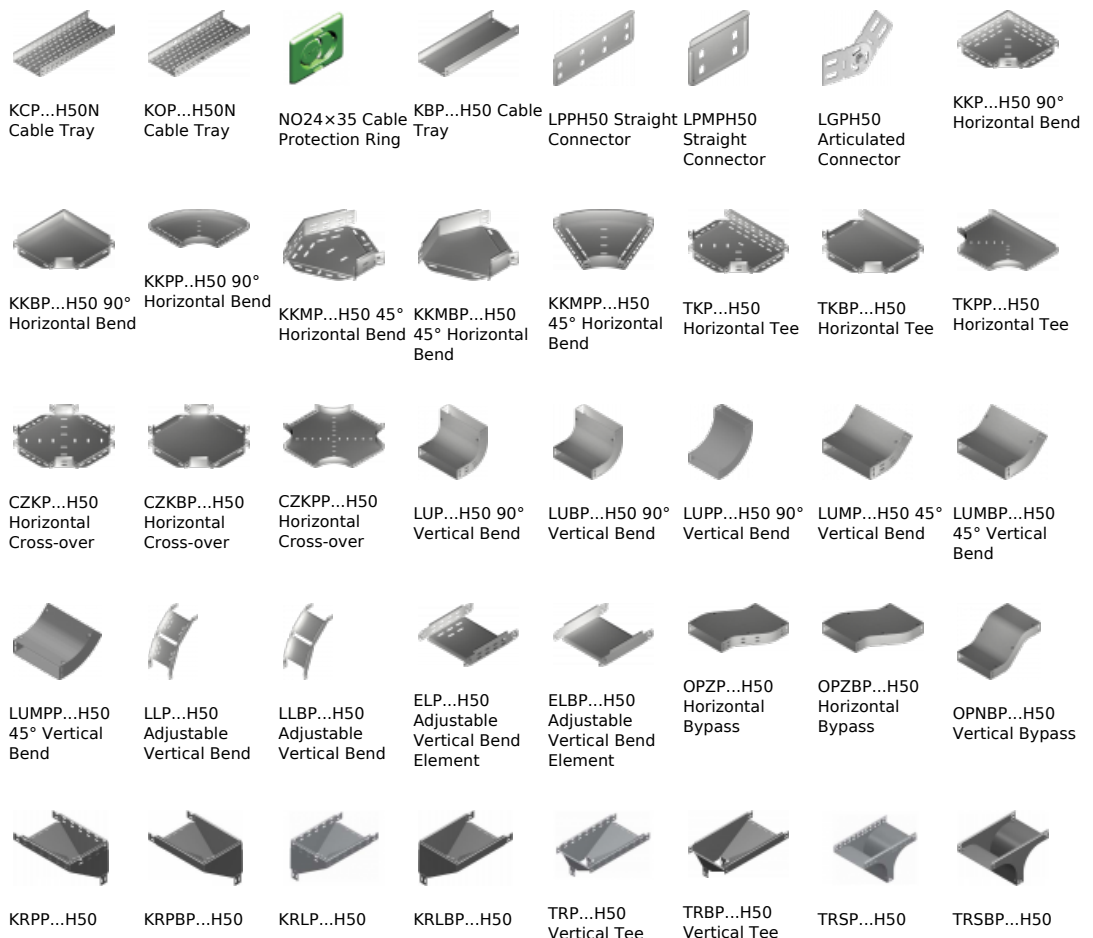

Vertical Elbow - Right	Vertical Elbow - Right	Vertical Elbow - Left	Vertical Elbow - Left	-Lengthwise	-Lengthwise	Vertical Tee - Crosswise	Vertical Tee - Crosswise
							
RKLP...H50 Left Reducer	RKLB...H50 Left Reducer	RKPP...H50 Right Reducer	RKPB...H50 Right Reducer	RKSP...H50 Straight Reducer	RKSBP...H50 Straight Reducer	TKDP...H50 Add-on Tee	LRPPH50 Corner Connector