



OPZJ...H60 Horizontal Bypass

Overview:

Application
Diversion in cable routing.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)




For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
OPZJ50H60	50	166324	2	0,62
OPZJ100H60	100	167810	2	0,86
OPZJ150H60	150	167815	2	1,12
OPZJ200H60	200	167820	2	1,38
OPZJ300H60	300	167830	2	1,92
OPZJ400H60	400	167840	2	2,44
OPZJ500H60	500	167850	2	3,18
OPZJ600H60	600	167860	2	3,52

Connected products:

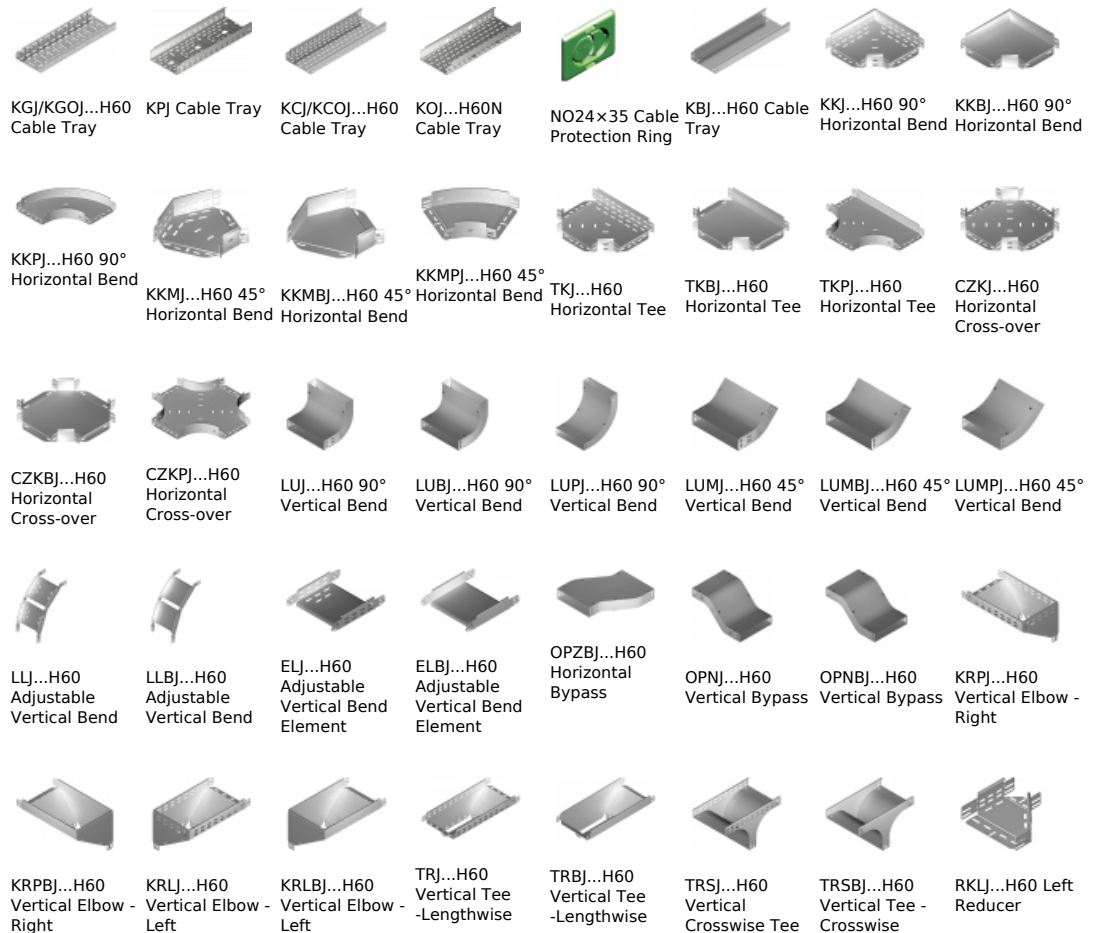



RKLBJ...H60 Left Reducer



RKPJ...H60 Right Reducer



RKPBJ...H60 Right Reducer



RKSJ...H60 Straight Reducer



RKSBJ...H60 Straight Reducer



LRJH60 Corner Connector



LRBH60 Corner Connector



TKDJ...H60 Add-on Tee



LRPJH60 Corner Connector