

LUMBP...H60 45° Vertical Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

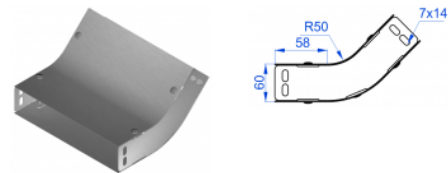


For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUMBP50H60	50	168024	2	0,62
LUMBP100H60	100	161704	2	0,92
LUMBP150H60	150	161804	2	1,18
LUMBP200H60	200	161904	2	1,51
LUMBP300H60	300	162104	2	2,10
LUMBP400H60	400	162204	2	2,68
LUMBP500H60	500	162304	2	3,24
LUMBP600H60	600	162404	2	3,84

Connected products:

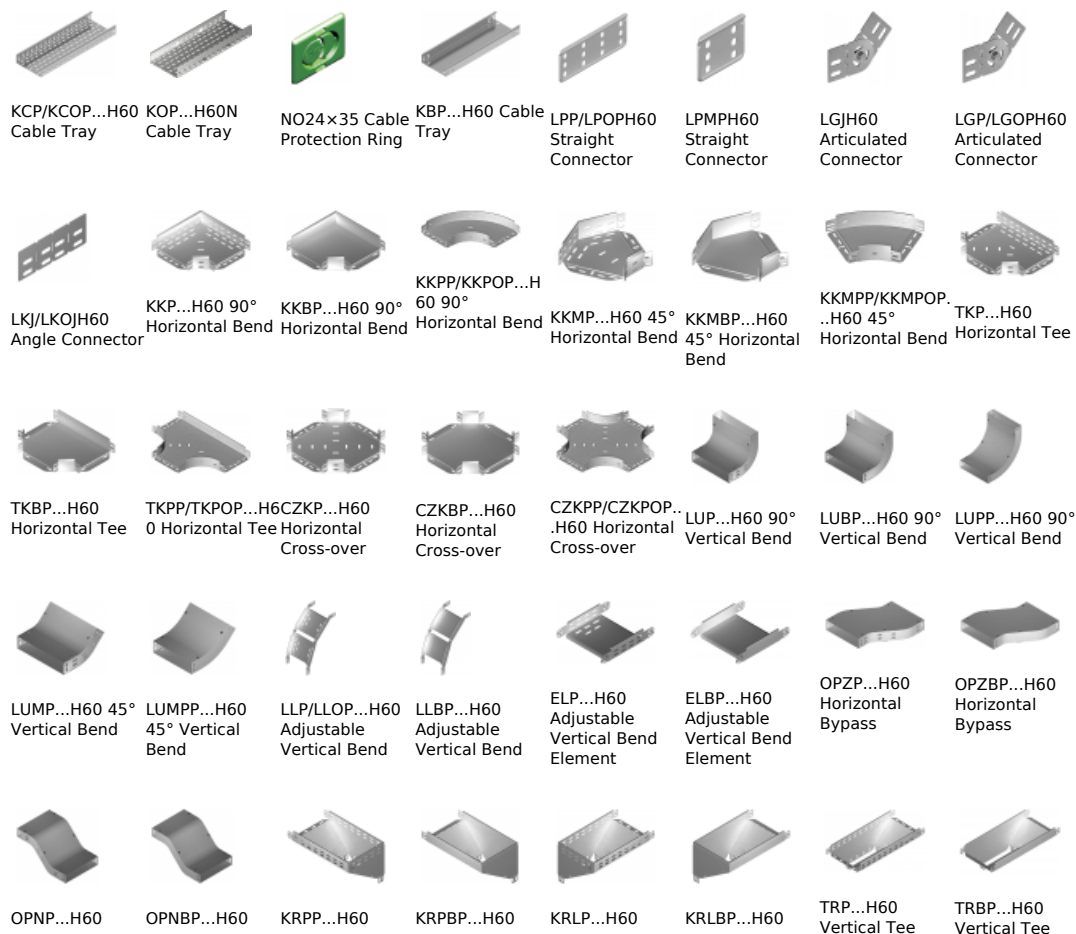

Vertical Bypass	Vertical Bypass	Vertical Elbow - Right	Vertical Elbow - Right	Vertical Elbow - Left	Vertical Elbow - Left	-Lengthwise	-Lengthwise
							
TRSP...H60 Vertical Tee - Crosswise	TRSBP...H60 Vertical Tee - Crosswise	RKLP...H60 Left Reducer	RKLBP...H60 Left Reducer	RKPP...H60 LeftRight Reducer	RKPBP...H60 Right Reducer	RKSP...H60 Straight Reducer	RKSBP...H60 Straight Reducer
							
TKDP...H60 Add-on Tee	LRPPH60 Corner Connector						