

ELJ...H60 Adjustable Vertical Bend Element

Overview:

Application

Diversions in cable routing. Full-range angle adjustment with a lock.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

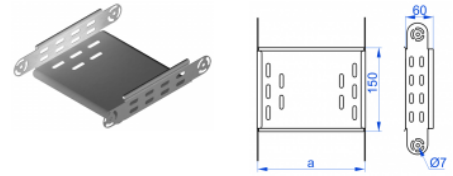

Used to create vertical bends of any internal radius through adding articulated connectors.

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELJ50H60	50	168524	4	0,26
ELJ100H60	100	167610	4	0,41
ELJ150H60	150	167615	4	0,50
ELJ200H60	200	167620	4	0,58
ELJ300H60	300	167630	4	0,74
ELJ400H60	400	167640	4	0,91
ELJ500H60	500	167650	4	1,07
ELJ600H60	600	167660	4	1,24

Connected products:

