

WPLS... Universal Bracket

Overview:

Application

Supporting cable trays and ladders, pipes, and other systems' components, particularly where installation of cable runs is space-restricted (e.g. above a suspended ceiling)

Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)


L- powder coating in a full range of colours (PC)

**Each of bracket is supplied with a Protective Cap
NOW40x22**

**Brackets can be assembled directly to the wall or ceiling
bracket**

WPCW/WPCO or Support channel CWC40H40

Brackets can be used in vertical and horizontal position

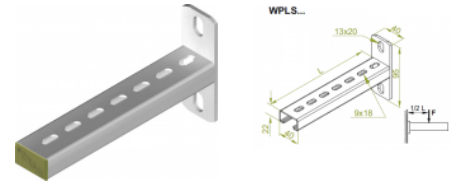

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load Fmax[kN]
WPLS100	115	900310	50	0,20	1,90
WPLS150	165	900315	50	0,27	1,80
WPLS200	215	900320	30	0,34	1,70
WPLS300	315	900330	30	0,49	1,30
WPLS400	415	900340	30	0,61	1,00
WPLS500	515	900350	20	0,75	0,80