

WPTS... Universal Bracket

Overview:

Application

Supporting cable trays and ladders, pipes, and other systems' components, particularly where installation of cable runs is space-restricted (e.g. above a suspended ceiling)

Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)


Each of bracket is supplied with a Protective Cap

NOW40x40

Brackets can be assembled directly to the wall or ceiling bracket

WPCW/WPCO or Support channel CWC40H40

Brackets can be used in vertical and horizontal position

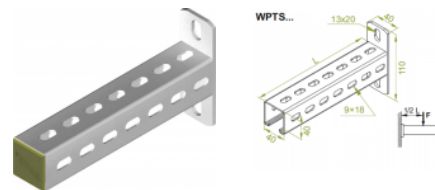

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load Fmax[kN]
WPTS100	115	902412	30	0,48	3,00
WPTS150	165	902417	30	0,57	2,50
WPTS200	215	902422	30	0,65	2,00
WPTS300	315	902432	30	0,92	1,70
WPTS400	415	902442	20	1,12	1,60
WPTS500	515	902452	20	1,33	1,40
WPTS600	615	902462	20	1,39	1,30
WPTS700	715	902472	8	1,78	1,20
WPTS800	815	902482	8	1,93	1,10
WPTS900	915	902492	8	2,16	1,00
WPTS1000	1015	902414	8	2,38	0,90