

LUPJ...H60 90° Vertical Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

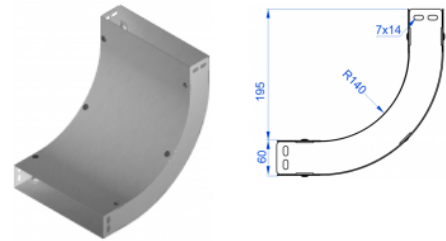


For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUPJ50H60	50	167524	2	0,72
LUPJ100H60	100	165714	2	1,01
LUPJ150H60	150	165814	2	1,30
LUPJ200H60	200	165914	2	1,63
LUPJ300H60	300	166014	2	2,36
LUPJ400H60	400	166114	2	3,09
LUPJ500H60	500	166214	2	3,81
LUPJ600H60	600	166314	2	4,54

Connected products:

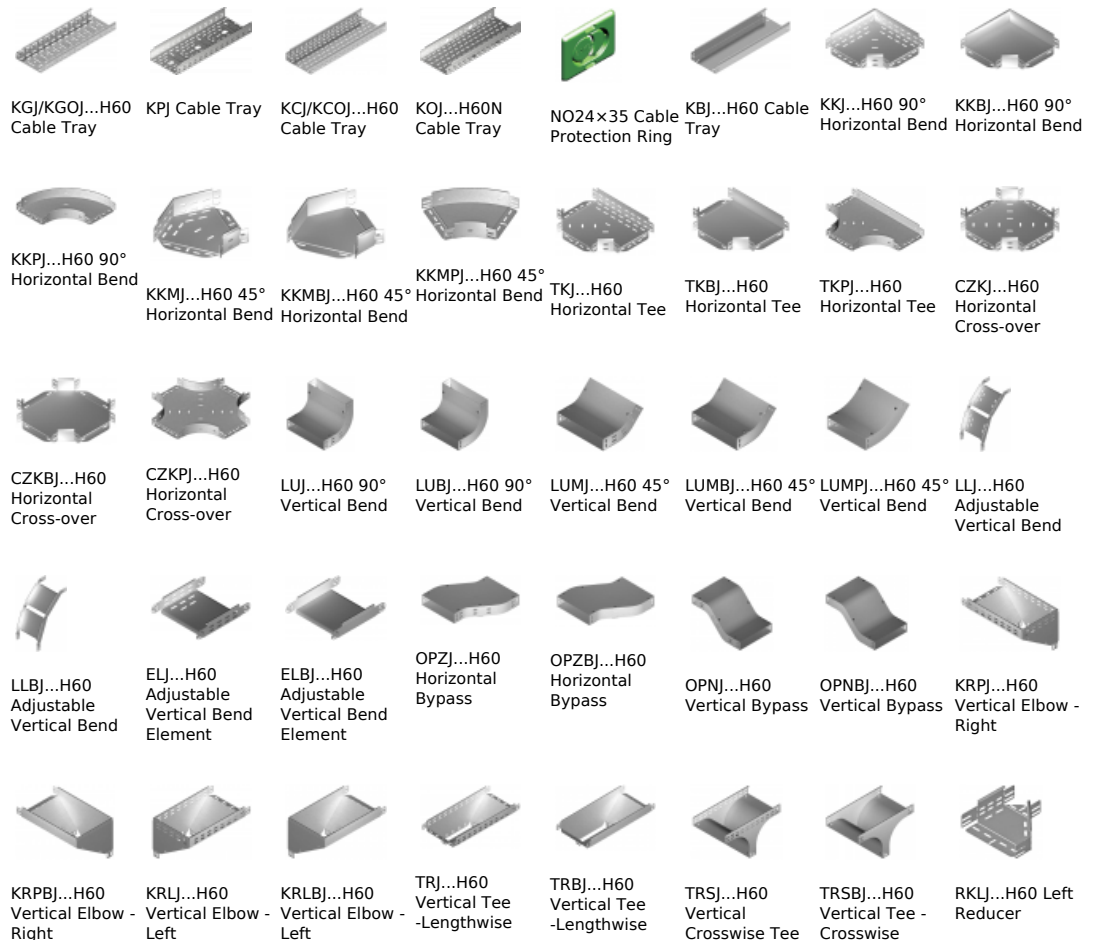



RKLBJ...H60 Left Reducer



RKPJ...H60 Right Reducer



RKPBJ...H60 Right Reducer



RKSJ...H60 Straight Reducer



RKSBJ...H60 Straight Reducer



LRJH60 Corner Connector



LRBH60 Corner Connector



TKDJ...H60 Add-on Tee



LRPJH60 Corner Connector