

WFMCS... Bracket

Overview:

Application

Suspending/fastening wire mesh cable trays.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

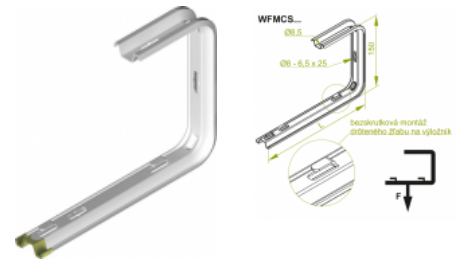

Each of bracket is supplied with a Protective Cap

For assembly, use of PD11 spacers is suggested.

Important!

Bracket WFMCS may be used in combination with Clamping

Piece ZS/ZSO to substitute other system components

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WFMCS100	138	901810	20	170	0,24	0,35
WFMCS150	163	901815	20	170	0,26	0,30
WFMCS200	238	901820	20	170	0,33	0,25
WFMCS300	338	901830	20	170	0,42	0,20
WFMCS400	438	901840	20	170	0,52	0,15