

LUMPJ...H60 45° Vertical Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

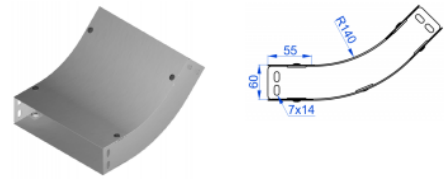


For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUMPJ50H60	50	168124	2	0,55
LUMPJ100H60	100	167114	2	0,70
LUMPJ150H60	150	167214	2	1,05
LUMPJ200H60	200	167314	2	1,77
LUMPJ300H60	300	167414	2	2,12
LUMPJ400H60	400	167514	2	2,45
LUMPJ500H60	500	167614	2	2,79
LUMPJ600H60	600	167714	2	3,19

Connected products:

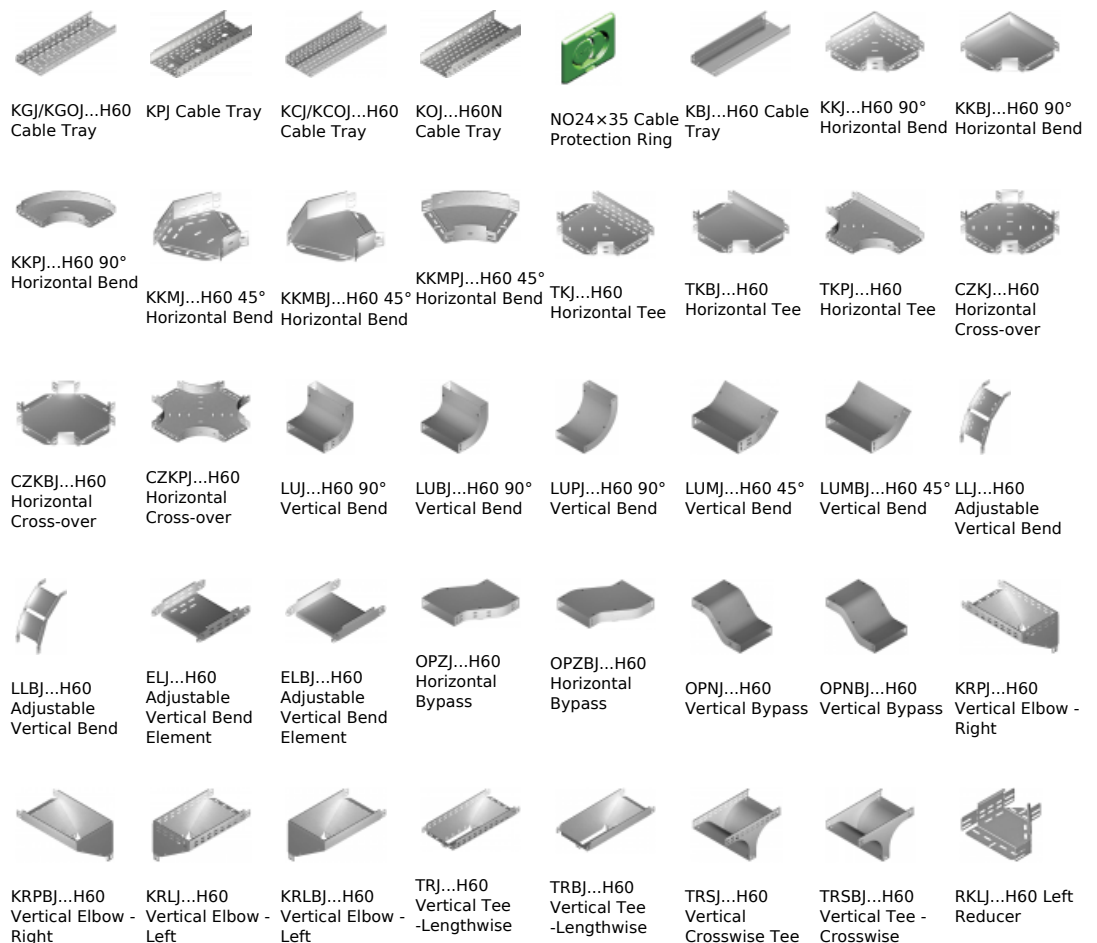



RKLBJ...H60 Left Reducer



RKPJ...H60 Right Reducer



RKPBJ...H60 Right Reducer



RKSJ...H60 Straight Reducer



RKSBJ...H60 Straight Reducer



LRJH60 Corner Connector



LRBH60 Corner Connector



TKDJ...H60 Add-on Tee



LRPJH60 Corner Connector