

MKR Anchor Bolt

Overview:

Application

Installing, assembling, hamding cable route to Autoclaved aerated concrete, Slicate brics, concrete and Protherm style clay block bricks


Material

Electro-galvanised (EG)

Attention:

-for assembly to Porotherm style clay block bricks do not use hammer drill

-to assembly in aerated concrete anchorscan be driven in without previouslt drilled holes.

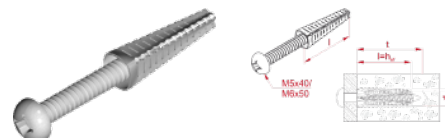

Versions:

Symbol	Catalogue number	Quantity in box	Driller Ø d0 [mm]	Anchoring effective depth hef [mm]
MKR6x32	803941	50	8	32
MKR8x38	803942	50	11	38