

KOJ...H80N Cable Tray


Overview:

Application
Cable routing

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

Important! Possibility of joining cable tray sections together through sliding one into another and connector-free assembly. Available when ordering in large quantity are 2m long tray sections. To install cable tray use Screw Sets SGK M6x12 or SG M6x12.




Versions:

Sheet thickness: 1,0 mm

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KOJ100H80/3N	3000	100	181010	6	1,70	7800
KOJ150H80/3N	3000	150	181015	4	2,03	11800
KOJ200H80/3N	3000	200	181020	4	2,36	15800
KOJ300H80/3N	3000	300	181030	4	3,21	23800
KOJ400H80/3N	3000	400	181040	2	3,87	31800
KOJ500H80/3N	3000	500	181050	2	4,32	39800
KOJ600H80/3N	3000	600	181060	2	4,98	47800

Connected products:

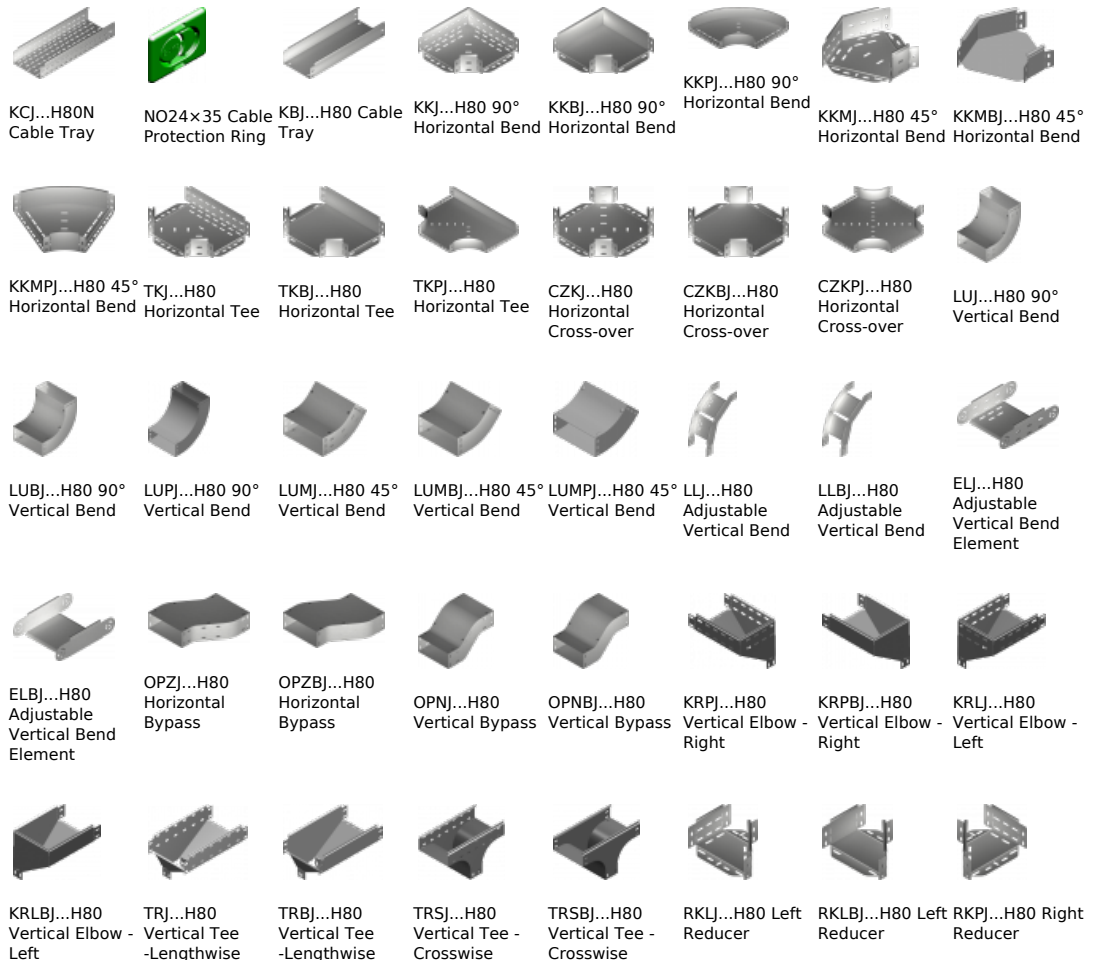

RKPBJ...H80
Right ReducerRKSJ...H80
Straight
ReducerRKSBJ...H80
Straight
ReducerLRJH80 Corner
ConnectorLRBJH80 Corner
ConnectorTKDJ...H80
Add-on TeeLRPJH80 Corner
Connector