

## KMC...H50 Cable Tray

### Overview:

#### APPLICATIONS

Connecting cable routes.

#### MATERIAL


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).

Available finishes:

F- steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304)

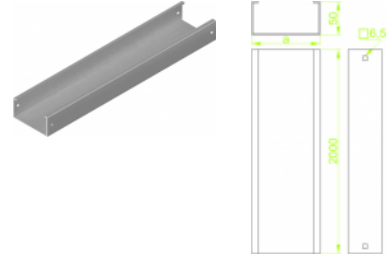

#### Cable trays together with covers in a set

Sheet thickness: **2,0 mm**

### Versions:

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KMC50H50/2	2000	50	810305	2	2,80
KMC100H50/2	2000	100	810310	2	3,62
KMC200H50/2	2000	200	810320	2	5,27
KMC300H50/2	2000	300	810330	2	6,92
KMC400H50/2	2000	400	810340	2	8,56
KMC500H50/2	2000	500	810350	2	10,21
KMC600H50/2	2000	600	810360	2	11,86