


LKMP...H50 Straight Connector

Overview:

APPLICATIONS
Connecting cable routes.

MATERIAL
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E - stainless steel (SS), grade 1.4301 (AISI304)

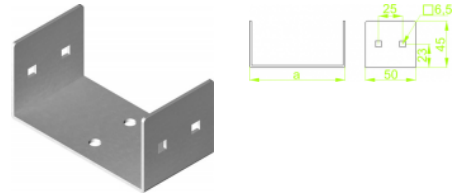

Use Screw Sets SGKM6×14 to install

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LKMP50H50	45	810405	2	0,11
LKMP100H50	95	810410	2	0,21