


KKBJ...H80 90° Horizontal Bend

Overview:

Application
Diversions in cable routing.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

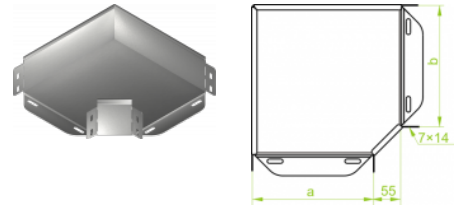


For installation use Screw Sets SGK M6×12 or SG M6×12.
In case of special orders please specify dimensions a and b.

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKBJ100H80	100	186110	10	0,48
KKBJ150H80	150	186115	10	0,62
KKBJ200H80	200	186120	10	0,90
KKBJ300H80	300	186130	4	1,60
KKBJ400H80	400	186140	4	2,30
KKBJ500H80	500	186150	2	3,06
KKBJ600H80	600	186160	2	4,06

Connected products:

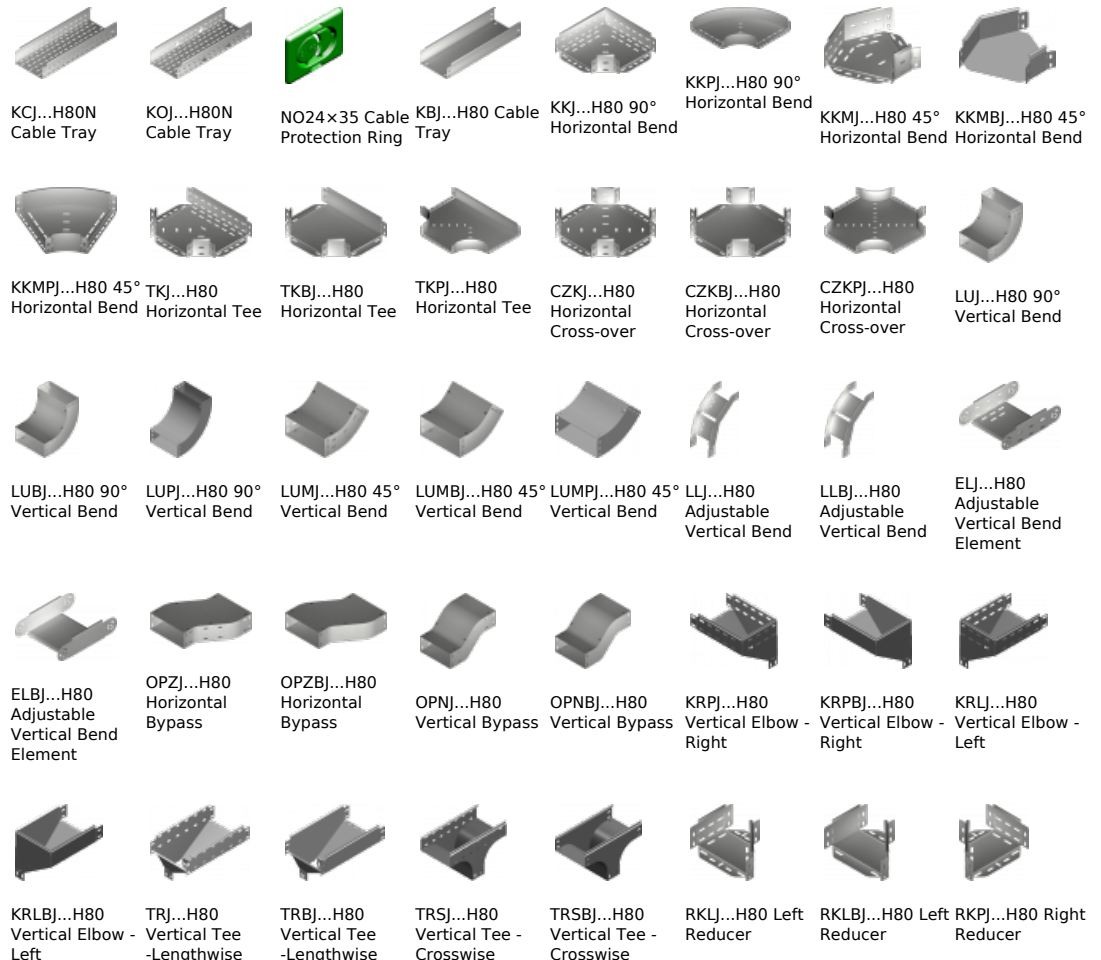

RKPBJ...H80
Right ReducerRKSJ...H80
Straight
ReducerRKSBJ...H80
Straight
ReducerLRJH80 Corner
ConnectorLRBJH80 Corner
ConnectorTKDJ...H80
Add-on TeeLRPJH80 Corner
Connector