


OPNKMC...H50 Vertical Bypass

Overview:

APPLICATIONS
 Bypassing mechanical obstacles in cable routing

MATERIAL
 Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).
 Available finishes:
 F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
 E - stainless steel (SS), grade 1.4301 (AISI304)

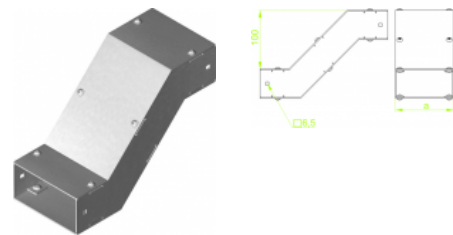

For installation use Screw Sets SGKM6×14 and Straight Connectors LKM...

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
OPNKMC200H50	200	812220	2	0,00
OPNKMC300H50	300	812230	2	0,00
OPNKMC400H50	400	812240	2	0,00
OPNKMC500H50	500	812250	2	0,00
OPNKMC600H50	600	812260	2	0,00