


## KKMBJ...H80 45° Horizontal Bend

### Overview:

**Application**  
Diversion in cable routing.

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
E- stainless steel (SS)  
L- powder coating in a full range of colours (PC)

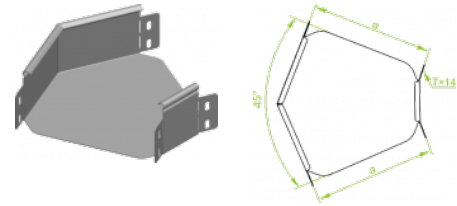


**For installation use Screw Sets SGK M6×12 or SG M6×12.**

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMBJ100H80	100	186310	10	0,34
KKMBJ150H80	150	186315	10	0,43
KKMBJ200H80	200	186320	10	0,63
KKMBJ300H80	300	186330	4	1,12
KKMBJ400H80	400	186340	4	1,61
KKMBJ500H80	500	186350	2	2,14
KKMBJ600H80	600	186360	2	2,84

### Connected products:

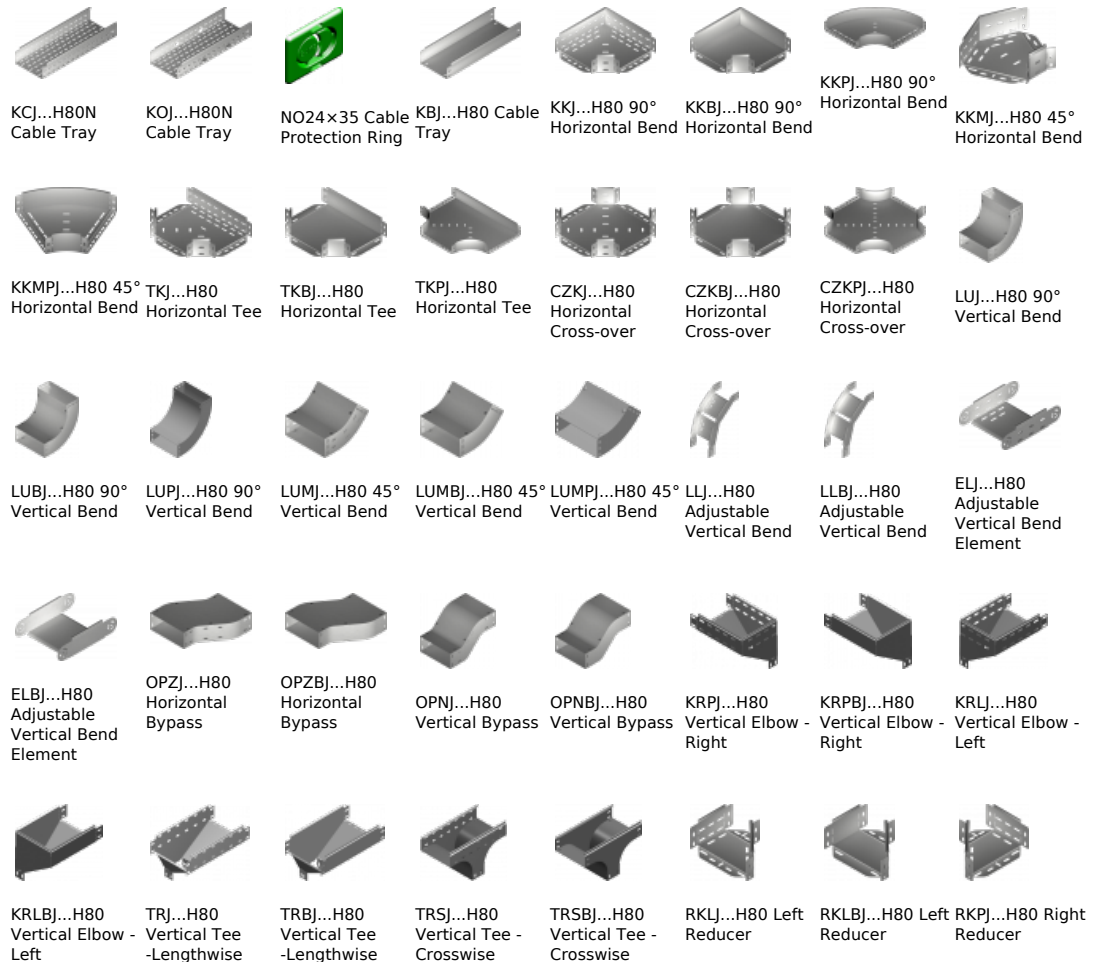

RKPBJ...H80  
Right ReducerRKSJ...H80  
Straight  
ReducerRKSBJ...H80  
Straight  
ReducerLRJH80 Corner  
ConnectorLRBJH80 Corner  
ConnectorTKDJ...H80  
Add-on TeeLRPJH80 Corner  
Connector