

KMC..H100 Cable Tray

Overview:

APPLICATIONS

Connecting cable routes.

MATERIAL


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).

Available finishes:

F- steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304)

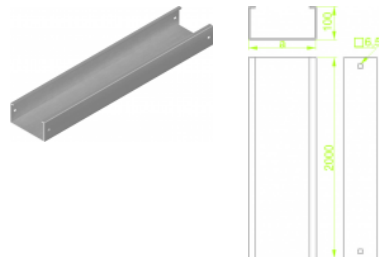

Cable trays together with covers in a set

Sheet thickness: **2,0 mm**

Versions:

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KMC100H100/2	2000	100	813610	2	5,27
KMC200H100/2	2000	200	813620	2	6,92
KMC300H100/2	2000	300	813630	2	8,56
KMC400H100/2	2000	400	813640	2	10,24
KMC500H100/2	2000	500	813650	2	11,86
KMC600H100/2	2000	600	813660	2	13,51