

LKMC...H100 Straight Connector

Overview:

APPLICATIONS

Connecting cable routes.

MATERIAL


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).

Available finishes:

F- steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304)

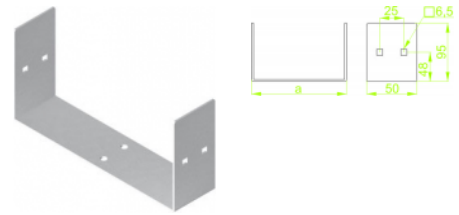

Use Screw Sets SGKM6×14 to install

Sheet thickness: **2,0 mm**

Versions:

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LKMC200H100	195	813820	2	0,64
LKMC300H100	295	813830	2	0,80
LKMC400H100	395	813840	2	0,96
LKMC500H100	495	813850	2	1,12
LKMC600H100	595	813860	2	1,28