


OPZKMC...H100 Horizontal Bypass

Overview:

APPLICATIONS
 Bypassing mechanical obstacles in cable routing

MATERIAL
 Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).
 Available finishes:
 F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
 E - stainless steel (SS), grade 1.4301 (AISI304)

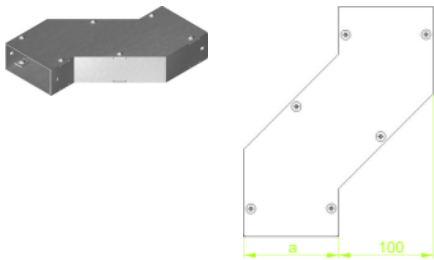

For installation use Screw Sets SGKM6×14 and Straight Connectors LKM...

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
OPZKMC200H100	200	815320	2	0,00
OPZKMC300H100	300	815330	2	0,00
OPZKMC400H100	400	815340	2	0,00
OPZKMC500H100	500	815350	2	0,00
OPZKMC600H100	600	815360	2	0,00