


## PZKWL... Reinforced cover with Lock

### Overview:

#### APPLICATION

Cable protection against damage.  
Used in heavy dust indoor conditions.

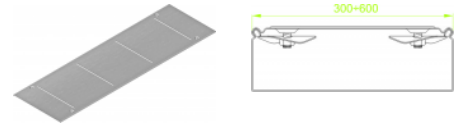

#### MATERIAL

Steel, strip-galv. acc. to the Sendzimir  
to method PN-EN 10346:2011 (SG)  
Available finishes:  
F- steel, hot-dip galv to  
PN-EN ISO 1461:2011 (HDG)  
for 1mm thick min  
E - stainless steel (SS), grade 1.4301 (AISI304)  
for 1mm thick min  
L- powder coating in a full range of colours (PC)

Sheet thickness: **0,7 mm**

### Versions:

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
<b>PZKWL300/2</b>	<b>2000</b>	<b>300</b>	<b>108830</b>	<b>4</b>	<b>1,92</b>
<b>PZKWL300/3</b>	<b>3000</b>	<b>300</b>	<b>108930</b>	<b>4</b>	<b>1,92</b>
<b>PZKWL400/2</b>	<b>2000</b>	<b>400</b>	<b>108840</b>	<b>4</b>	<b>2,52</b>
<b>PZKWL400/3</b>	<b>3000</b>	<b>400</b>	<b>108940</b>	<b>4</b>	<b>2,52</b>
<b>PZKWL500/2</b>	<b>2000</b>	<b>500</b>	<b>108850</b>	<b>2</b>	<b>3,12</b>
<b>PZKWL500/3</b>	<b>3000</b>	<b>500</b>	<b>108950</b>	<b>2</b>	<b>3,12</b>
<b>PZKWL600/2</b>	<b>2000</b>	<b>600</b>	<b>108860</b>	<b>2</b>	<b>3,72</b>
<b>PZKWL600/3</b>	<b>3000</b>	<b>600</b>	<b>108960</b>	<b>2</b>	<b>3,72</b>