


PZKWL... Reinforced cover with Lock

Overview:

APPLICATION

Cable protection against damage.
 Used in heavy dust indoor conditions.

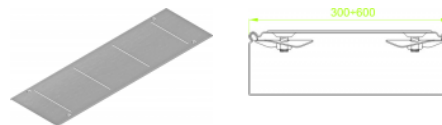

MATERIAL

Steel, strip-galv. acc. to the Sendzimir
 to method PN-EN 10346:2011 (SG)
 Available finishes:
 F- steel, hot-dip galv to
 PN-EN ISO 1461:2011 (HDG)
 for 1mm thick min
 E - stainless steel (SS), grade 1.4301 (AISI304)
 for 1mm thick min
 L- powder coating in a full range of colours (PC)

Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
PZKWL300/2	2000	300	108830	4	1,92
PZKWL300/3	3000	300	108930	4	1,92
PZKWL400/2	2000	400	108840	4	2,52
PZKWL400/3	3000	400	108940	4	2,52
PZKWL500/2	2000	500	108850	2	3,12
PZKWL500/3	3000	500	108950	2	3,12
PZKWL600/2	2000	600	108860	2	3,72
PZKWL600/3	3000	600	108960	2	3,72